




A BARRY-WEHMILLER COMPANY

Model 40P

Can Seaming & Manufacturing Machine

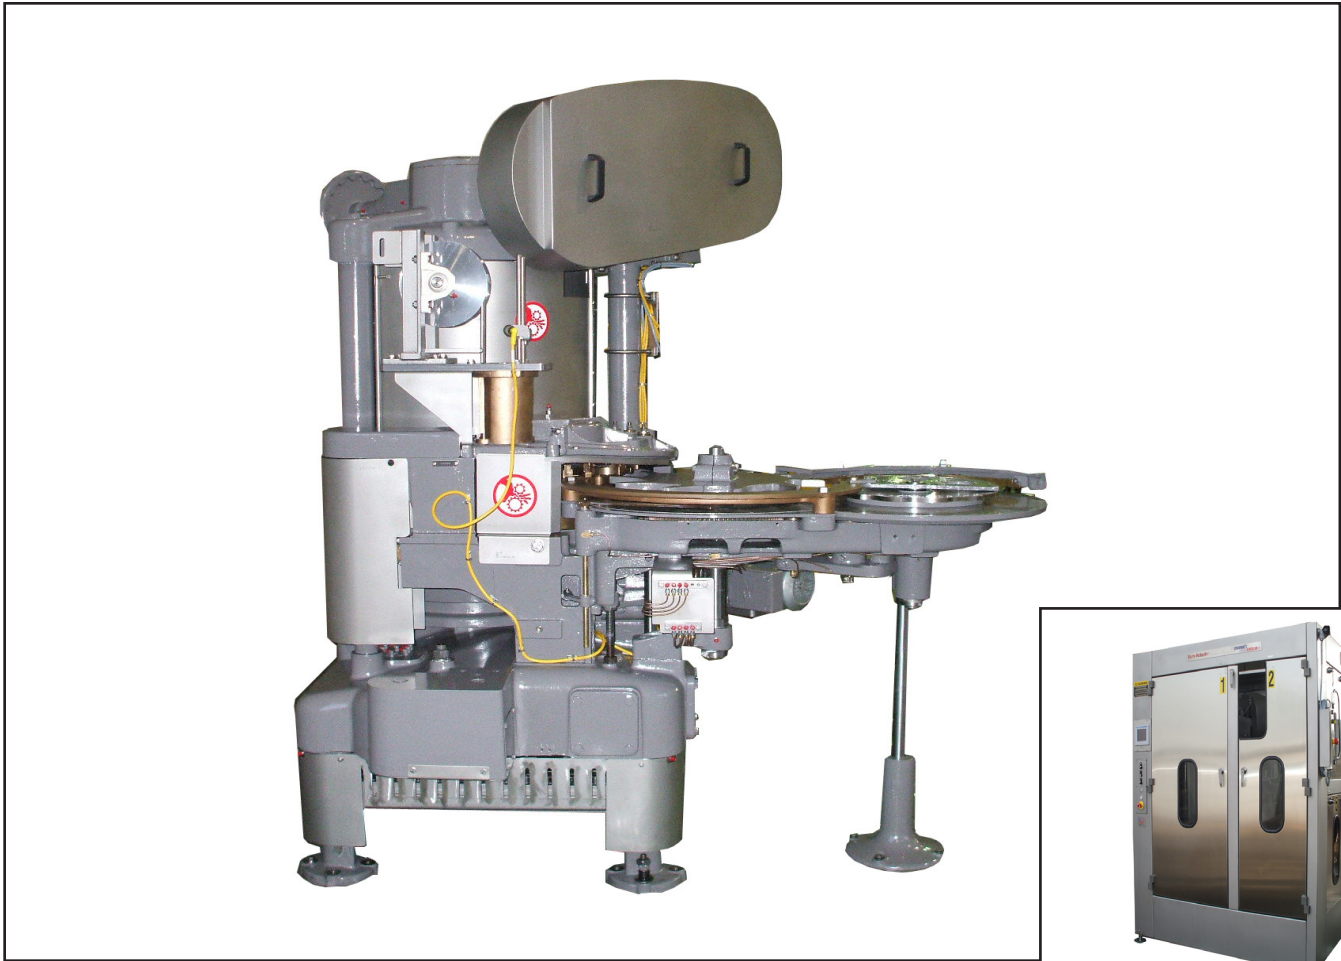

Key Features


- Rated Speed up to 275 CPM
- One set of Can and End Change Parts
- No Can/No Cover Feed
- Reciprocating Cover Separator Knife
- Revolving 4-head Rotary Seaming Turret
- Wide Range of Accessories and Attachments
- Free-Standing Stainless Steel Machine Enclosure with Door Interlocks
- Grease Lubrication
- Variable Speed Motor Drive
- Electric Brake
- Disk Feed Infeed
- Tool Kit & Instruction Manual

Model 40P

Can Seaming & Manufacturing Machine

Optional Features

- Under Cover Gassing
- Steam Vacuum
- Single Roll Cover Separator
- Titanium Nitride coated Angelloy® Seaming rolls with Ceramic Bearings
- Titanium Nitride coated Angelloy® Seaming Chucks
- Toppers or Packers
- Can Manufacturing
- Rotary Embossing Type Cover Marker
- Cover Feed Chute with Vibrator
- Filler Connecting Parts
- Random Worm Infeed
- Magnetic Downstacker Chute with Vibrator
- Mechanical Driven Machine Height

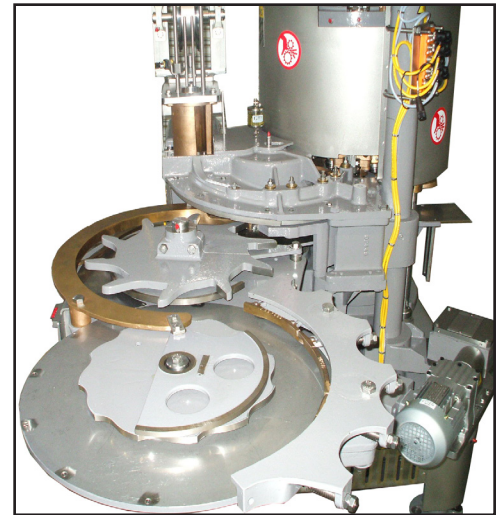

Technical Specifications	English	Metric
No. of Seaming Stations	4	4
Output Speed Range	20-275 CPM	20-275 CPM
Min./Max. Can Diameter	202-404	54.0-108.0 mm
Min./Max. Can Diameter	108-404	38.1-108.0 mm
Min./Max. Can Height	108-700	38.1-177.8 mm
MSLF (Optional)	108-812	38.1-222.3 mm
MSLF (SV & UCG)	111-700	42.9-177.8 mm
DF (Optional)	108-1000	38.1-254.0 mm
DF (SV & UCG)	111-700	42.9-177.8 mm
Transfer Chain Pitch Centers (MSLF)	6.00"	152.4 mm
Transfer Chain Pitch Centers (DF)	Random	Random
Horsepower/Electrical	5 hp	4 kW
Electrical Controls	24 VDC	24 VDC
CO ² /Nitrogen Gas	100 psi @ 70F	6.9 bar @ 21C
Steam Supply	330 psi @ 85F	5.9 bar @ 165C
Net Weight MSLF (Approx.)	5,900 lbs	2,676 kg
Gross Weight Domestic MSLF (Approx.)	6,900 lbs	3,130 kg
Gross Weight Export MSLF (Approx.)	7,300 lbs	3,311 kg

USA | AUSTRALIA | BELGIUM | CANADA | HONG KONG | UNITED KINGDOM



A BARRY-WEHMILLER COMPANY

4485 ALLEN RD | STOW, OH 44224 USA | +1 (330) 923-0491

WWW.PNEUMATICSCALEANGELUS.COM | SALES@PSANGELUS.COM