




A BARRY-WEHMILLER COMPANY

Model 56P Can Seaming & Manufacturing Machine

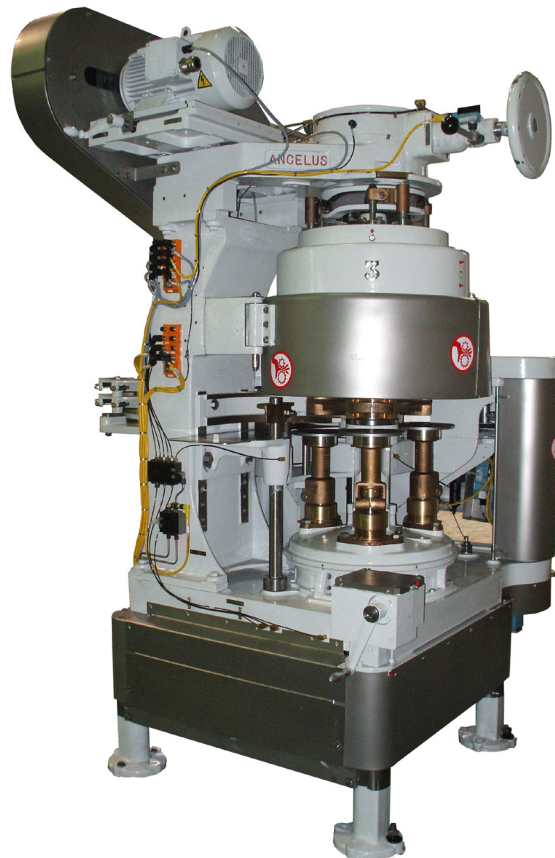

Key Features


- Rated Speed up to 300 CPM
- Revolving 3-Head Rotary Seaming Turret with Seaming Levers
- Head Spin Machine
- One set of Can and End Change Parts
- Proven Box Style Knockout and Cap Centering Cams
- Soft Rise Lower Chuck Cam
- Free-Standing Stainless Steel Machine Enclosure with Door Interlocks Seaming Turret Safety Clutch
- 24 Volt DC Controls
- No Can/No Cover Feed
- Variable Speed Motor Drive
- Electric Brake
- Grease Lubrication

Model 56P

Can Seaming & Manufacturing Machine

Optional Features

- Under Cover Gassing
- Steam Vacuum
- Single Roll Cover Separator
- Titanium Nitride coated Angelloy® Seaming rolls with Ceramic Bearings
- Titanium Nitride coated Angelloy® Seaming Chucks
- Toppers or Packers
- Rotary Cover Marking Attachment
- Cover Feed Chute with Vibrator
- Can Manufacturing
- Filler Connecting Parts
- Random Worm Infeed
- Magnetic Downstacker Chute with Vibrator
- Mechanical Driven Machine Height

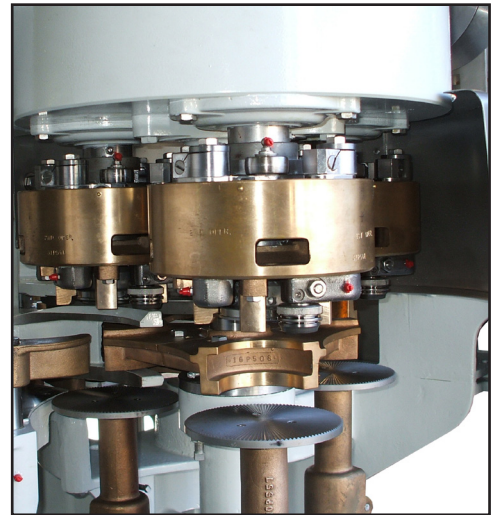

Technical Specifications	English	Metric
No. of Seaming Stations	3	3
Output Speed Range	10-300 CPM	10-300 CPM
Min./Max. Can Diameter	501-610	128.6-167.4 mm
Min./Max. Can Diameter (Optional)	307-701	87.3-179.4 mm
Min./Max. Can Height	308-910	88.9-244.5 mm
Min./Max. Can Height DF (Optional)	108-1204	38.1-311.2 mm
Min./Max. Can Height MSLF (Optional)	108-1109	38.1-293.7 mm
Min./Max Can Height MSLF (SV & UCG)	308-910	88.9-244.5 mm
Min./Max Can Height MSLF (SV & UCG - Optional)	208-1000	63.5-254.0 mm
Transfer Chain Pitch Can Centers (MSLF)	10.50"	266.7 mm
Transfer Chain Pitch Can Centers (DF)	Random	Random
Horsepower/Electrical	3-7.5 hp	2-6 kW
Electrical Controls	24 VDC	24 VDC

USA | AUSTRALIA | BELGIUM | CANADA | HONG KONG | UNITED KINGDOM



A BARRY-WEHMILLER COMPANY 4485 ALLEN RD | STOW, OH 44224 USA | +1 (330) 923-0491
 WWW.PNEUMATICSCALEANGELUS.COM | SALES@PSANGELUS.COM