



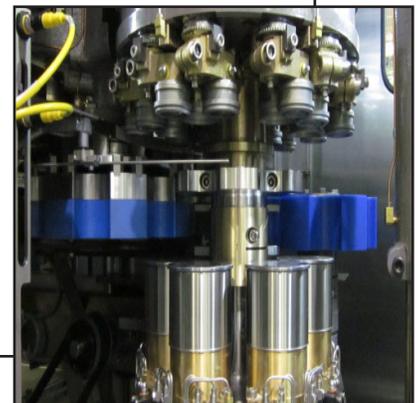

A BARRY-WEHMILLER COMPANY

## Series 2003, 2006 & 2008 RDS Closetech Rotary Double Seamers

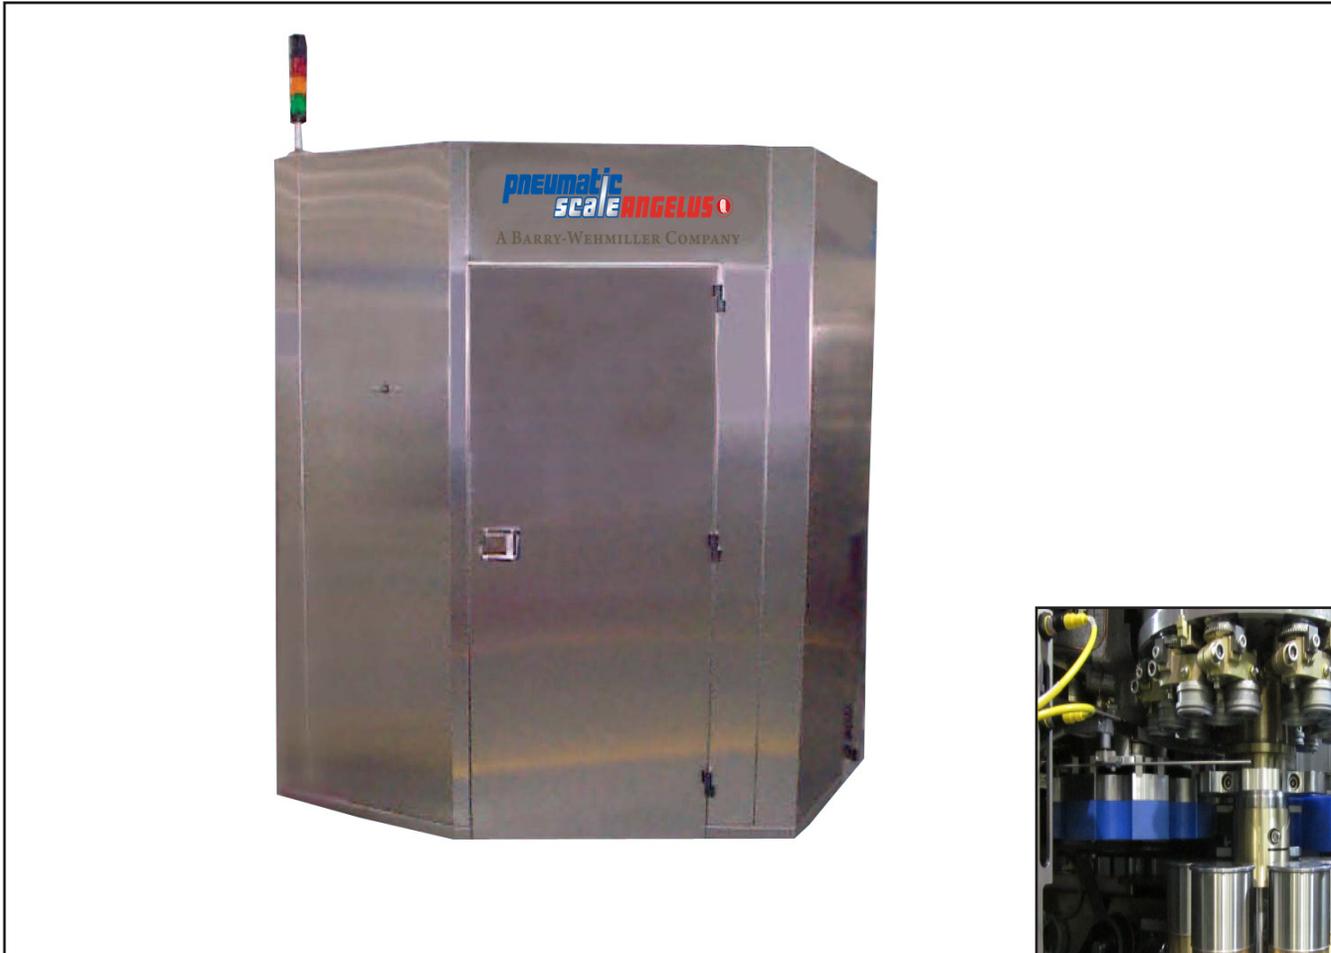

### Key Features

- Controlled can and cover assembly
- Innovative design reduces gearing by as much as 18%
- 180° can in-feed/discharge for easy line layout
- Quick change of seaming spindle speed alternatives
- Segmented seaming head/spindle and shank assemblies
- Closing of 110 through 800 high cans with a standard tin line
- Three-screw cover feed design provides optimum separation and control of all end types
- All parts affecting can height changes, (i.e. cover feed, cover guides, can feed turret) are supported and driven from the top housing, avoiding problems of sliding shaft and key fit alignment

# Series 2003, 2006 & 2008 RDS

## Closetech Rotary Double Seamers

PneumaticScaleAngelus offers the Closetech (formerly Continental Container Systems) 2000 Series Rotary Double Seamers for the wide ranging needs of can manufacturing operations.

The 2000 Series of Rotary Double Seamers has been value engineered to meet the current and future needs of the can manufacturing industry. The design incorporates many new features, and proven concepts developed over our 90+ years of seaming machine building experience. The high degree of parts interchangeability between all members of this series results in:

- Lower machine building **cost** due to larger manufacturing lot sizes of common parts.
- Reduced leadtime as a result of our ability to assemble the machine required to fill your exact requirements from a stock of common parts.
- Better parts prices and delivery due to the large number of common parts utilized on all models.
- Lower customer investments in spare parts inventory. A single set of common emergency spare parts can be maintained to cover the majority of your requirements for 3, 4, and 6 Spindle machines.



2000 RDS	2003 3- SPINDLE	2006 6- SPINDLE
Maximum Speed (dependent on can size, type, and type of drive)	400 CPM	400 CPM
Diameter range of cans handled	211 - 701*	202 - 408*
Height range of cans handled with standard tin line	208 - 910	110 - 800**
Net weight, approximate lbs/kg	4850 lbs 2200 kg	4900 lbs 2222 kg
Height max.	87.6" 222.5 cm	86" 218.4 cm
Width	49.70" 126.3 cm	49.70" 126.3 cm
Length, basic	79.50" 201.9 cm	79.50" 201.9 cm

\* With appropriate change parts, outside this range, consult sales office

\*\* Height to .012 may be handled with raised tin line

USA | AUSTRALIA | BELGIUM | CANADA | HONG KONG | UNITED KINGDOM



A BARRY-WEHMILLER COMPANY

4485 ALLEN RD | STOW, OH 44224 USA | +1 (330) 923-0491  
 WWW.PNEUMATICSCALEANGELUS.COM | SALES@PSANGELUS.COM